



Electric scissor lift JCPT1008HD

Electric scissor lift JCPT1008HD

STANDARD EQUIPMENT

- Proportional controls
- Automatic pothole protection
- Self-lock gate on platform
- Drivable at full height
- Non marking tires
- 2WD
- Automatic brakes system
- Emergency lowering system
- Emergency stop button
- Cylinder holding valve
- Onboard diagnostic system
- Tilt sensor with alarm
- All motion alarm
- Horn
- Hour meter
- Safety brackets
- Forklift pockets
- Folding guardrails
- Extended platform
- Charger protection
- Flashing beacon

OPTIONS

- Overload sensor with alarm
- AC power to the platform
- Platform work lights
- Airline to the platform

SPECIFICATIONS



Platform capacity (SWL) **230 kg**
 Platform capacity (SWL) on extension **113 kg**
 Maximum workers number **2**



Working height **10,0 m**
 Platform floor height **8,0 m**



Overall length **2,48 m**
 Overall width **0,81 m**
 Overall height (Rails up) **2,32 m**
 Overall height (Rails down) **1,99 m**
 Platform size **2,27 x 0,81 m**
 Platform extension size **0,9 m**
 Ground clearance (Stowed) **0,10 m**
 Ground clearance (Raised) **0,019 m**
 Wheelbase **1,87 m**
 Turning radius (inside) **0 m**
 Turning radius (outside) **2,1 m**



Lifting motor **24 V/3 kw**
 Driving motor **24 V/1,5 kw**



Travel speed (Stowed) **4 km / h**
 Travel speed (Raised) **0,8 km / h**
 Up / Down speed **42 / 30 sec**



Batteries **4 x 6 V / 210 Ah**
 Integrated charger **24 V / 25 A**







Gradeability **25 %**
 Maximum working slope **2 - 3 °**



Tires **Ø 381 x 127 mm**



Weight **2180 kg**

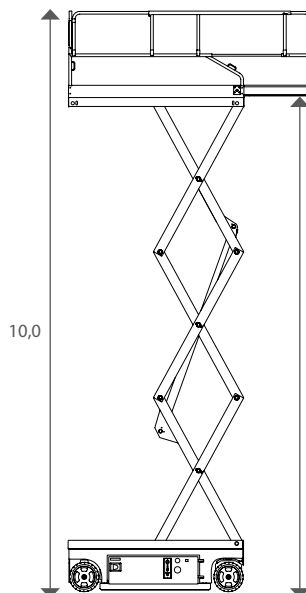

www.dingli.eu

INSTANT

Norway
 Tel.: +47 23 19 11 00
 info@instant.no

Lithuania
 Tel.: +370 5 233 1096
 info@instant.lt

Latvia
 Tel.: + 371 263 58 152
 info@instantlatvija.lv

Estonia
 Tel.: +372 680 76 33
 info@instant.ee